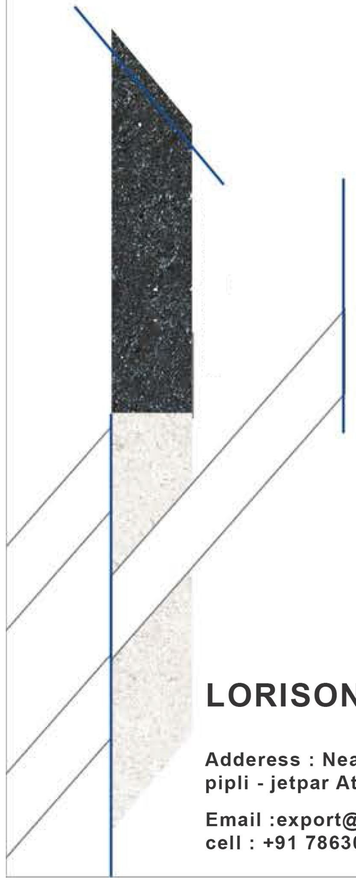

LORISON TILES LLP

Adderess : Near lovin tiles survey no . 273 ,274,275
pipli - jetpar At- Jivapar morbi - 363630Gujarat - INDIA

Email :export@lorisontiles.com
cell : +91 7863064031

COLLECTION 2018

DOUBLE CHARGE VITRIFIED TILES | 600x 600mm

LORISON
TILES L.L.P.

we believe in incredibly advanced LIVE
Be with like-minded people, with no judgements and no expectations and feel revitalized and at peace. A few hours or a few days away can be enough to help you recuperate and feel like yourself again, let us help you switch off and RELAX!
DOUBLE CHARGE
VITRIFIED TILES
600x 600mm

LORISON
TILES L.L.P.

600x 600mm | DOUBLE CHARGE VITRIFIED TILES | Laying on floor | Polished \ Glossy | Frost Resistance

ULTRA WHITE

ULTRA CREMA WHITE

ULTRA GREEN

ULTRA GOLD

tiles view shown: ULTRA CREMA WHITE & AQUA MAJASTIC

LORISON
TILES L.L.P.

600x 600mm | DOUBLE CHARGE VITRIFIED TILES | Laying on floor | Polished \ Glossy | Frost Resistance

ULTRA BEIGE

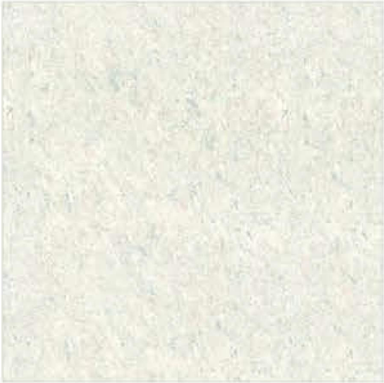

ULTRA PISTA

ULTRA PINK

AQUA BLACK

600x 600mm | DOUBLE CHARGE VITRIFIED TILES | Laying on floor | Polished \ Glossy | Frost Resistance

AQUA GREY

AQUA BROWN

AQUA ASH

AQUA LAVA

LORISON
TILES L.L.P.

600x 600mm | DOUBLE CHARGE VITRIFIED TILES | Laying on floor | Polished \ Glossy | Frost Resistance

AQUA MARBLE

AQUA MAJESTIC

AQUA ALMOND

AQUA BRONZE

tiles view shown: AQUA BRONZE

LORISON
TILES L.L.P.

600x 600mm | DOUBLE CHARGE VITRIFIED TILES | Laying on floor | Polished \ Glossy | Frost Resistance

AQUA GREEN

AQUA RED

PEARL WHITE

AQUA CHOCO

600x 600mm | DOUBLE CHARGE VITRIFIED TILES | Laying on floor | Polished \ Glossy | Frost Resistance

technical specification

TECHNICAL PARAMETERS	ASTM	CEN	ISO	INT. STD	LORISON TILES
Deviation in length/width	C 499	EN 98	10545-2	± 0.6%	± 0.1%
Deviation in Thickness	C 499	EN 98	10545-2	± 0.5%	± 0.1%
Straightness of side	-	EN 98	10545-2	± 0.5%	± 0.1%
Rectangularity	-	EN 98	10545-2	± 0.6%	± 0.2%
Surface flatness	C 485	EN 98	10545-2	± 0.5%	± 0.2%
Water absorption	C 373	EN 99	10545-3	< 0.5%	< 0.05%
Scratch hardness (Moh's)	C 849	EN 101	-	> 6	> 8
Modulus fo Rupture (N/mm^2)	C 648	EN 100	10545-4	> 27 N/mm^2	> 47 N/mm^2
Breaking Strength (N)	C 648	-	-	1113 N	2830 N
Skid Resistance	C 1028	-	DIN51130	> 0.4	> 0.6
Abrasion resistance (N/mm^3)	-	EN 102	10545-6	< 204 N/mm^2	< 144 N/mm^2
Linear thermal expansion (/°C)	C 372	EN 103	10545-8	< $9x10^{-6}$ N/mm^2	< $6x10^{-6}$ N/mm^2
Thermal shock resistance	C 484	EN 104	10545-9	No Damage	No Damage
Colour resistance to light	DIN 51094	-	10545-16	No Damage	No Damage
Glossiness (Reflection)	-	-	-	-	90 %
Chemical resistance (Except HF)	C 650	EN 106	10545-13	No Damage	No Damage
Density (gm/cc)	-	-	DIN51082	> 2	2.4
Frost resistance	-	-	10545-12	Frost Proof	Frost Proof
Decorative Faults	-	-	10545-2	Defect Free	Defect Free
Surface Quality	-	-	10545-2	95 % Defect Free	> 95%
Impact Resistance	-	-	-	Good	Good
Crazing Resistance	-	-	10545-11	No Crazing	No Crazing
Resistance to house hold chemicals	-	-	10545-13	No visible effect	No visible effect

packing details

Size	Thickness	No.of Tiles / Box	Coverage Area	Wt. of Box
600x600mm	9.2mm	4 Pcs.	1.44 Sq.Mtr.	29.00 Kg. (Approx)